



POPAGATIONSTATION™

PLUG POPPER BY T.O. PLASTICS

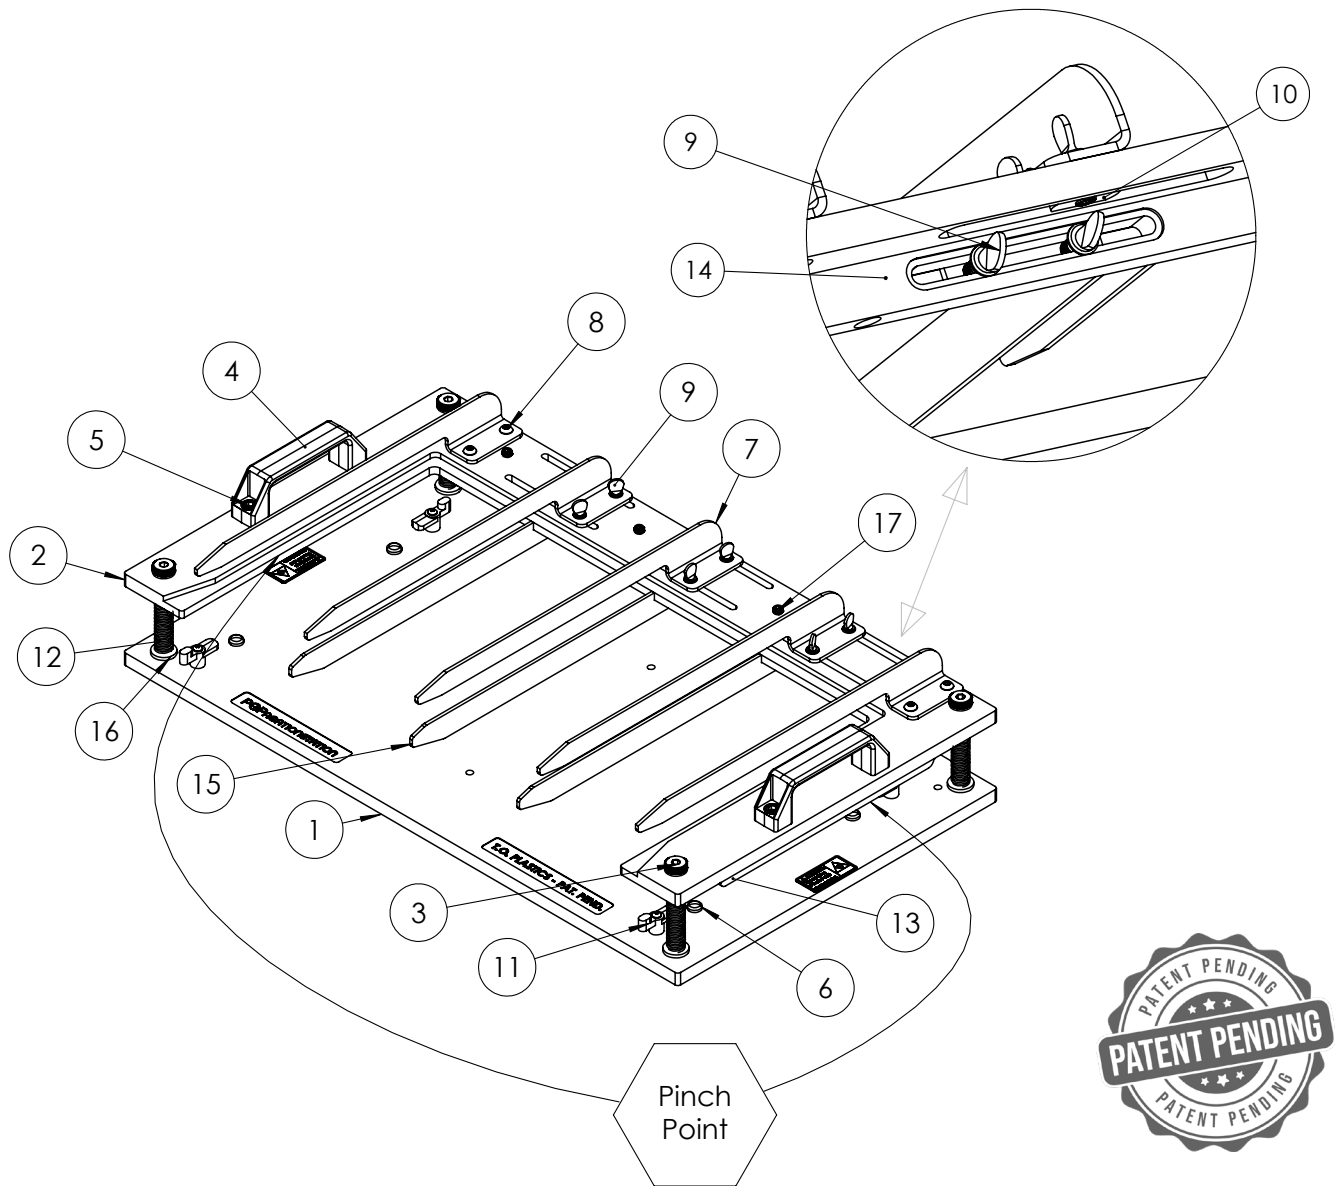


ITEM NO.	DESCRIPTION	QTY.
1	Bottom Plate	1
2	Top Plate	1
3	Alloy Steel Shoulder Screw	4
4	Rectangular Pull Handle	2
5	Socket Head Screw	4
6	Dowel Pin	4
7	Upper Rib	5
8	Socket Cap Screw	4

ITEM NO.	DESCRIPTION	QTY.
9	Thumb Screw	12
10	T-Nut	6
11	Black Plastic Turn Latch	4
12	Compression Spring	4
13	Side Support Bar	2
14	Rear Support Bar	1
15	Lower Ribs	3
16	Washer	4
17	#10 Socket Head Screw	4

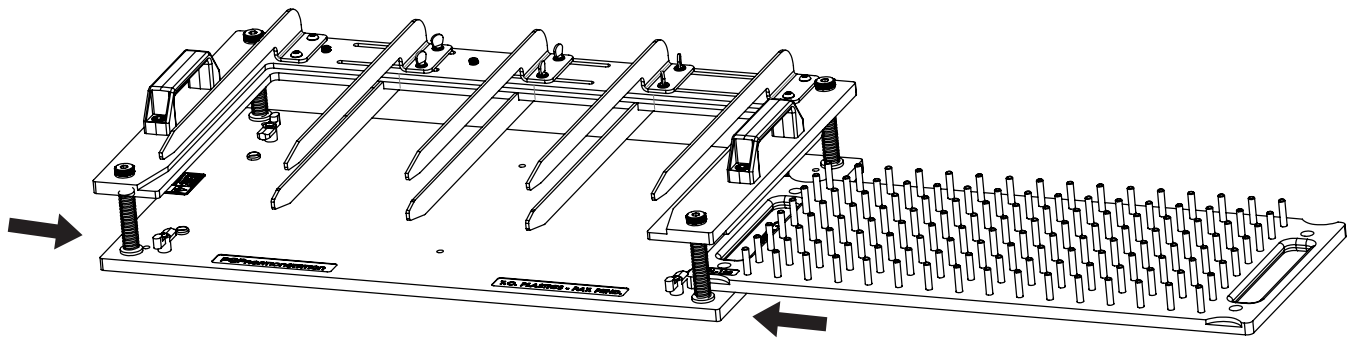



1. Slide base board into bottom plate of frame from either side (right or left).

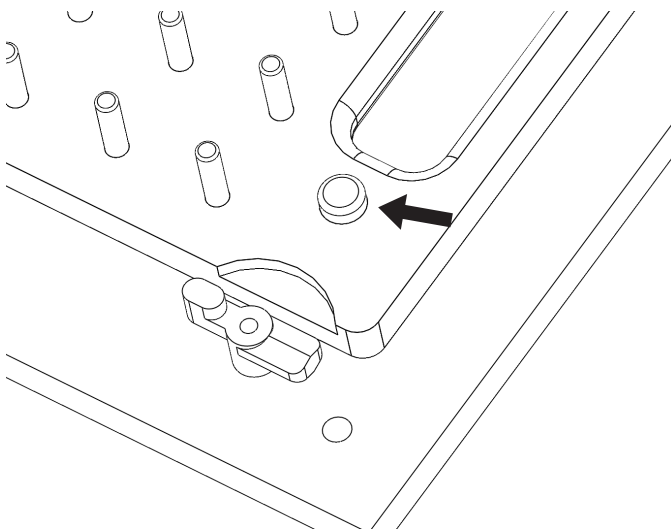




2. Align (4) holes in base board with (4) dowel pins in bottom plate.

3. Lock base board into place by rotating (4) turn latches.

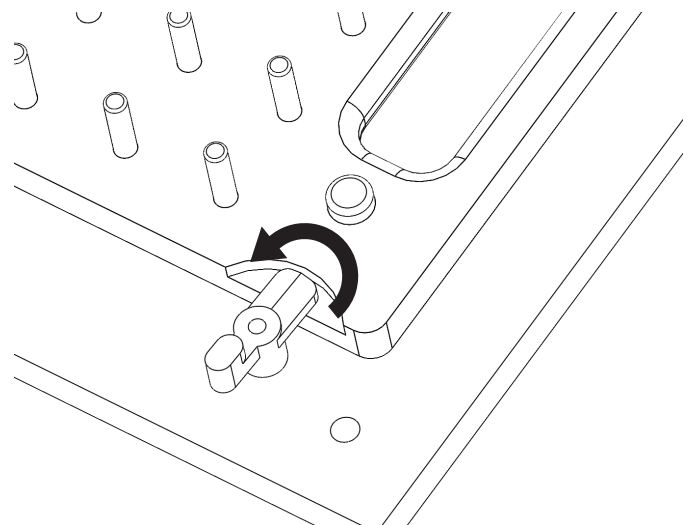


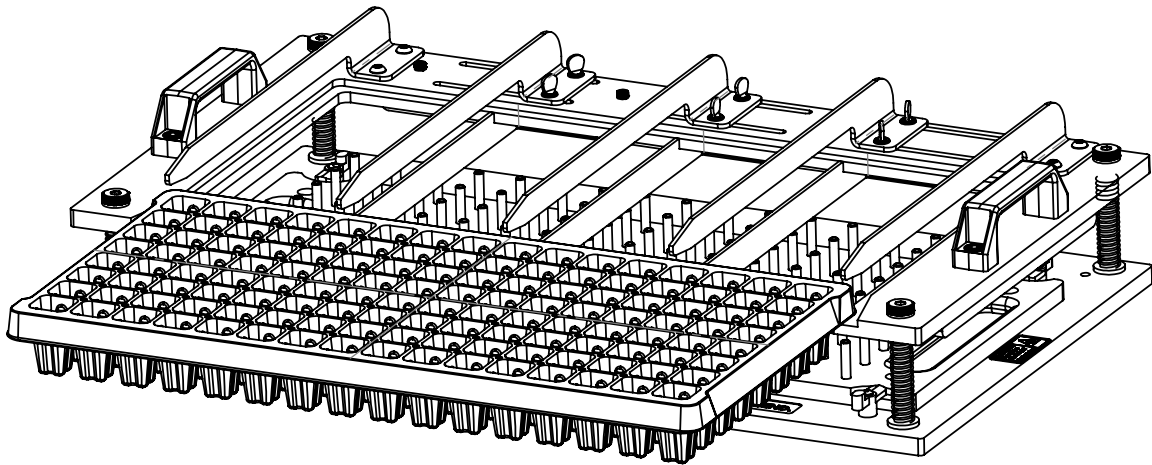

4. Align lower and upper support ribs between cells of plug tray.

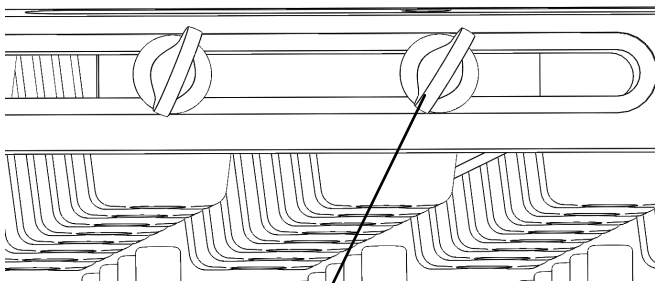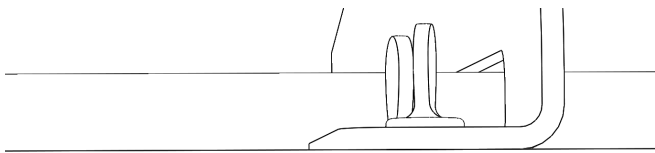


Thumb
Screw

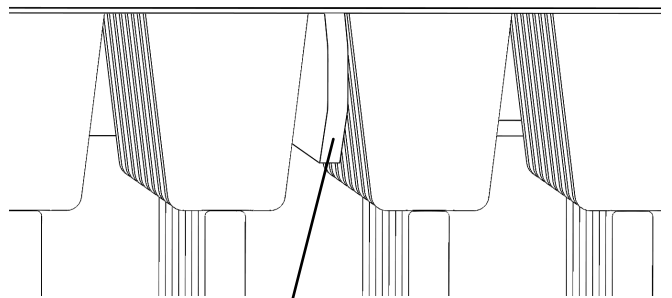


Lower
Rib


5. To adjust lower support ribs, loosen thumb screws and slide to align between cells of plug tray. Tighten to hold in place.

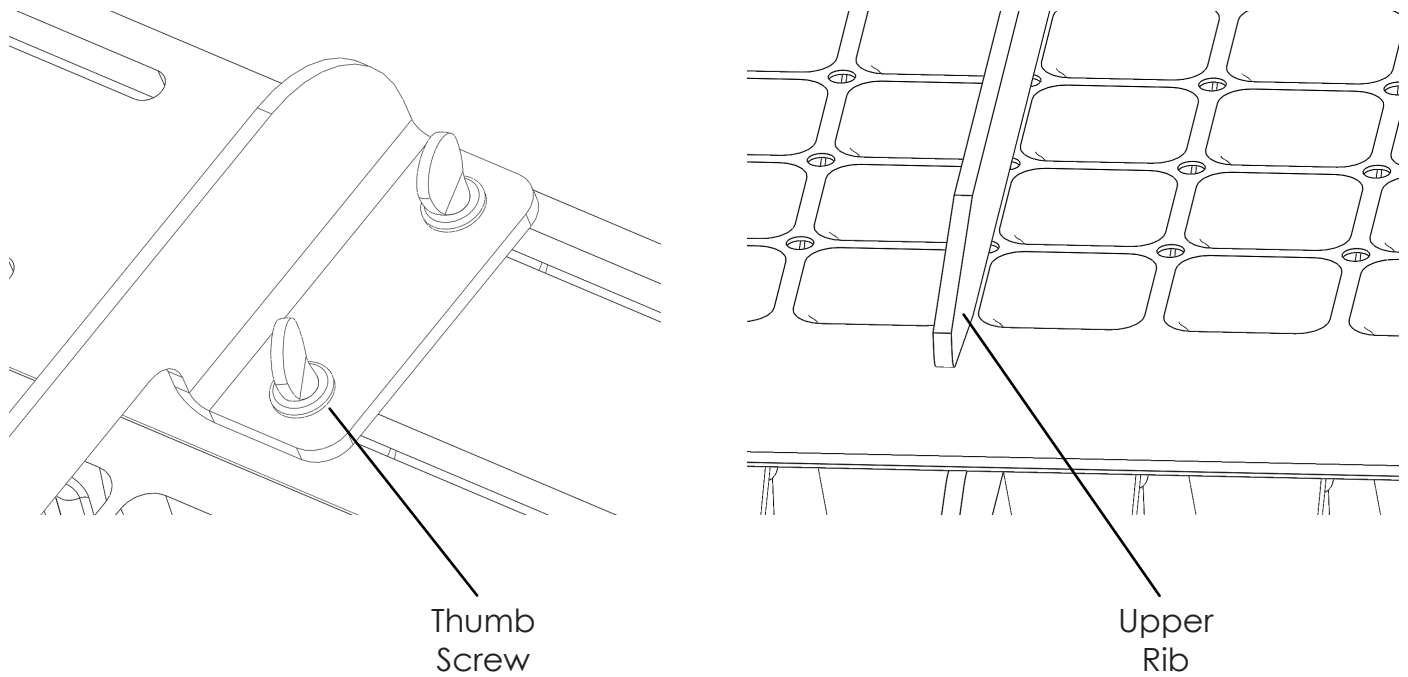


6. To adjust upper support ribs, loosen thumb screws and slide to align between cells of plug tray. Tighten to hold in place.

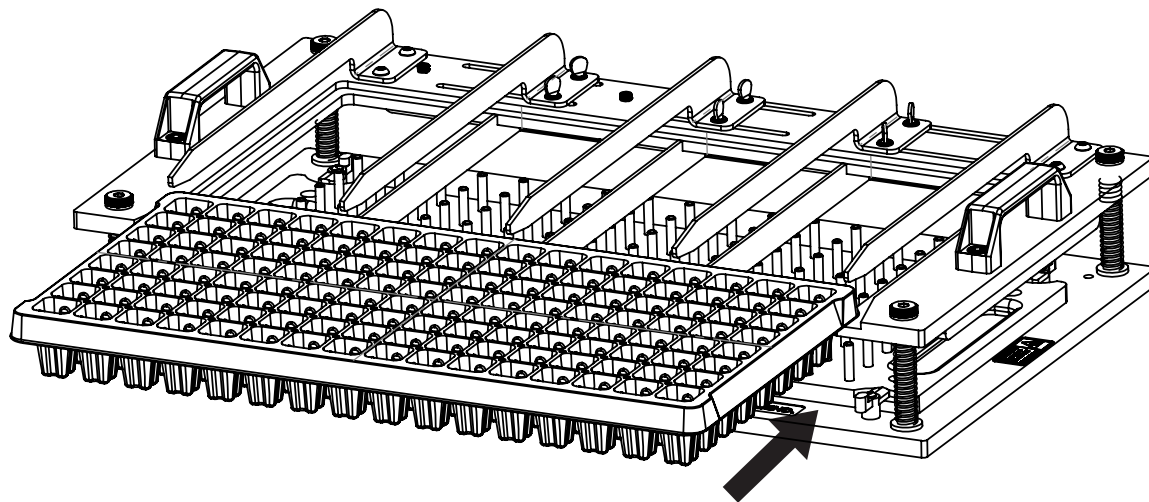


7. Slide plug tray into top plate between upper and lower support ribs from frame front.

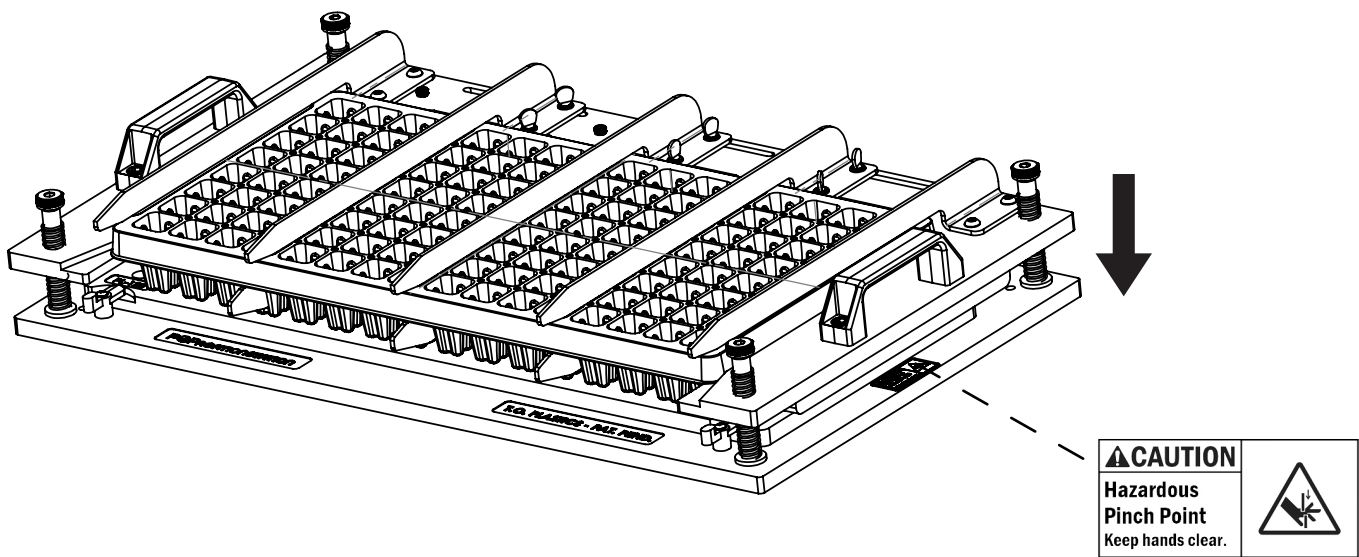

8. Using both handles, press top plate down to allow base board pins to penetrate drainage holes of plug tray to dislodge plugs from bottom of tray.

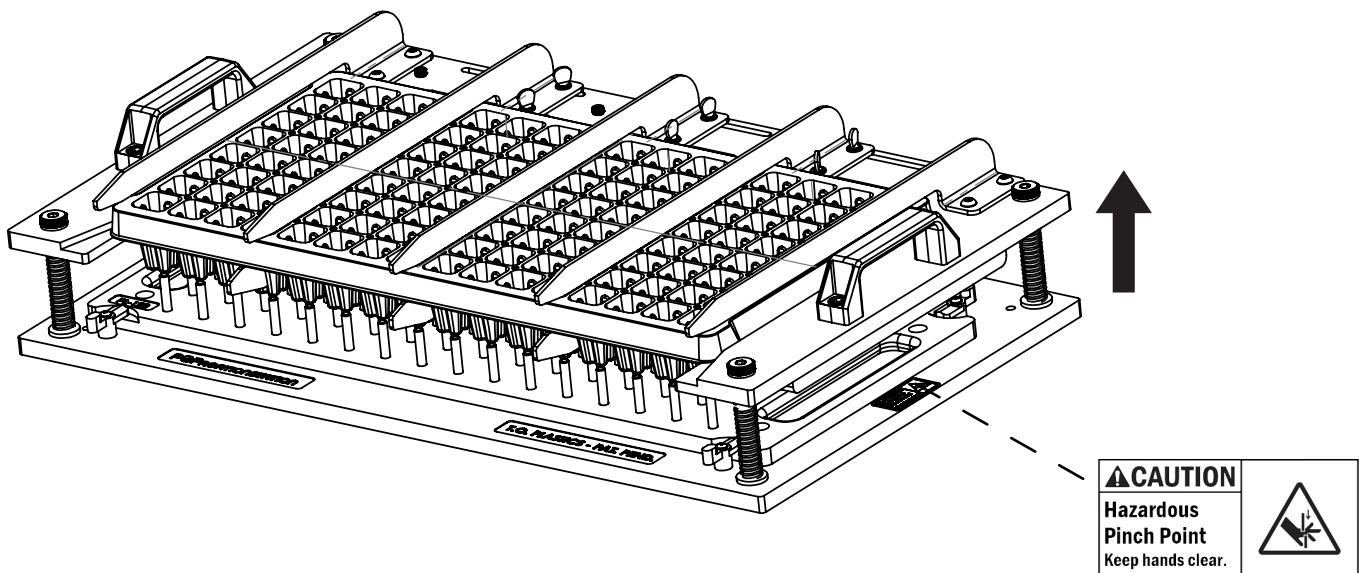

9. Release pressure on handles to return top plate to resting position.

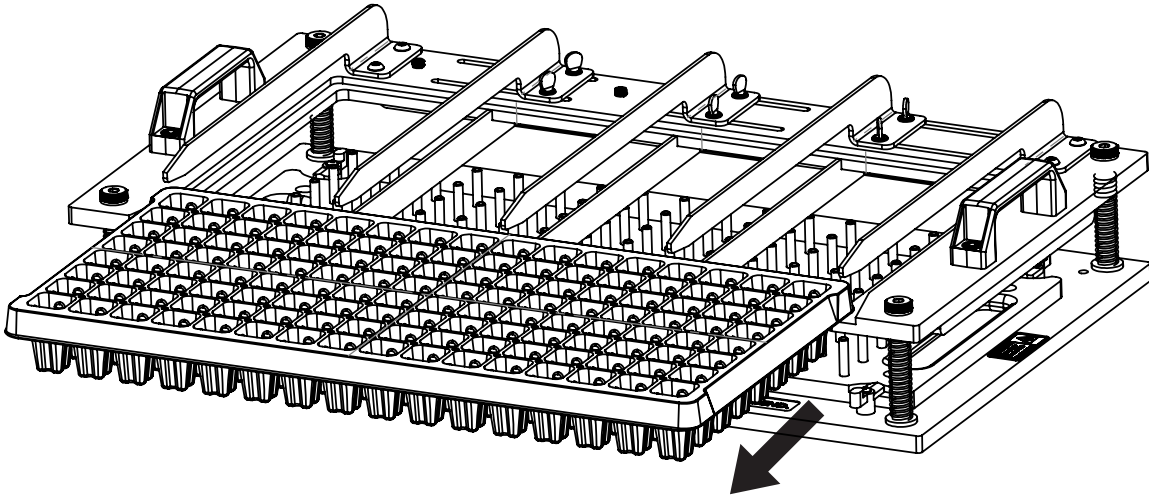

10. Slide plug tray out of frame front.

11. Remove excess soil and plant debris after use.



Scan to Watch
Instruction Video